HW2 SST

Height: 24.0" Width: 7.1" Depth: 14.3" (61.0cm) (18.0cm) (36.3cm)

- 2gal (7.57L) of hot water in a space-saving machine just 7.1" (18.03cm) wide to fit
- · Includes drip tray
- High quality, easy-to-clean stainless steel exterior and tank for a long, dependable
- Fresh, hot water is always available since the HW2 is plumbed to your water line



Agency:

Specifications

Product #: 02500.6000 Capacity at 60° F Temp. Setting: 200°F (93.333°C)

Water Access: Plumbed

Finish: Stainless Faucet: Upper

Additional Features

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
-	-	-	-	-	-	60°F (15.5°C)	-	-	-

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


ridinaling requirements						
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)			
20-90	138-621	1/4" Male Flare Fitting	-			

CAD Drawings

2D	Revit	KLC		
•				

MARNING:



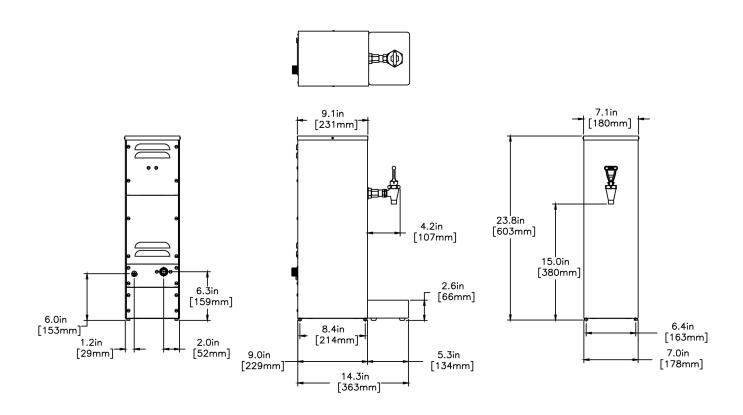

	Unit			Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	24.0 in.	7.1 in.	14.3 in.	-	-	-	-	-	
Metric	61.0 cm	18.0 cm	36.3 cm	-	-	-	-	-	



Related Products & Accessories: HW2 SST(02500.6000)













Serving & Holding Options: HW2 SST(02500.6000)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

