### H<sub>10</sub>X

Height: 34.4" Width: 10.2" Depth: 24.5" (87.4cm) (25.9cm) (62.2cm)

• Includes dry-plug prevention for easy installation



Agency:

#### **Specifications**

Temp. Setting: 212°F (100.000°C)

Product #: 26300.6000
Water Access: Plumbed

Finish: Stainless
Faucet: Upper

**Electrical & Capacity** 

			,						
Volts*	Amps	Watts	Cord Attached	Plug Type	8oz (236mL) cups/hr		Phase	# Wires	Hertz
					35°F (1.67°C)*	140°F (60°C)*	Tilasc	plus Ground	110112
-	-	-	-	-	211	397	-	-	-

<sup>\*</sup>Temperature of water entering the sy

\*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

#### Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)					
20-90	138-621	1/4" Male Flare Fitting	-					

## CAD Drawings


**Additional Features** 


2D	Revit	KLC		
•				

**MARNING**:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.



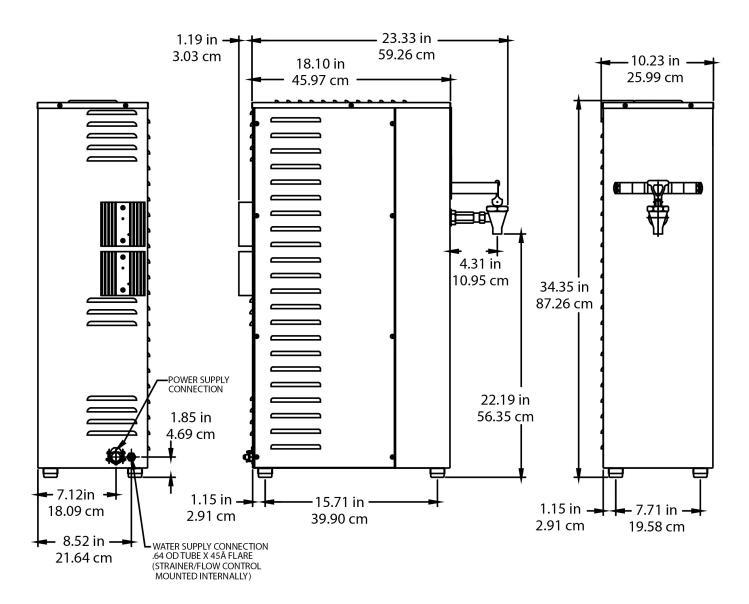

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	34.4 in.	10.2 in.	24.5 in.	39.0 in.	13.6 in.	27.5 in.	-	8.457 ft <sup>3</sup>
Metric	87.4 cm	25.9 cm	62.2 cm	99.1 cm	34.6 cm	69.9 cm	-	0.239 m³



## Related Products & Accessories:H10X(26300.6000)













# Serving & Holding Options: H10X(26300.6000)

\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*

