H₁₀X

Height: 34.4" Width: 10.2" Depth: 24.5" (87.4cm) (25.9cm) (62.2cm)



- Dispenses up to 24gal (90.85L) of boiling water per hour for food prep and cleaning
- Precise temperature (212°F / 100°C) ensures consistent, high quality results
- Includes dry-plug prevention for easy installation
- Prepare large amounts of mashed potatoes, gravy, cheese sauce, gelatin, oatmeal, and many more foods

Agency:

Specifications

Product #: 26300.6001 Temp. Setting: 212°F (100.000°C)

Water Access: Plumbed

Finish: Stainless
Faucet: Upper

Electrical & Capacity

			,						
Volts*	Amps	Watts	Cord Attached	Plug Type	8oz (236mL) cups/hr		Phase	# Wires	Hertz
					35°F (1.67°C)*	140°F (60°C)*	Filase	plus Ground	TIGILE
-	-	-	-	-	211	397	-	-	-

^{*}Temperature of water entering the sy

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

	r lambing requirements							
PSI k		kPa	Fitting Supplied	Water Flow Required (GPM)				
	20-90	138-621	1/4" Male Flare Fitting	-				


CAD Drawings


Additional Features

2D	Revit	KLC		
•				

MARNING:





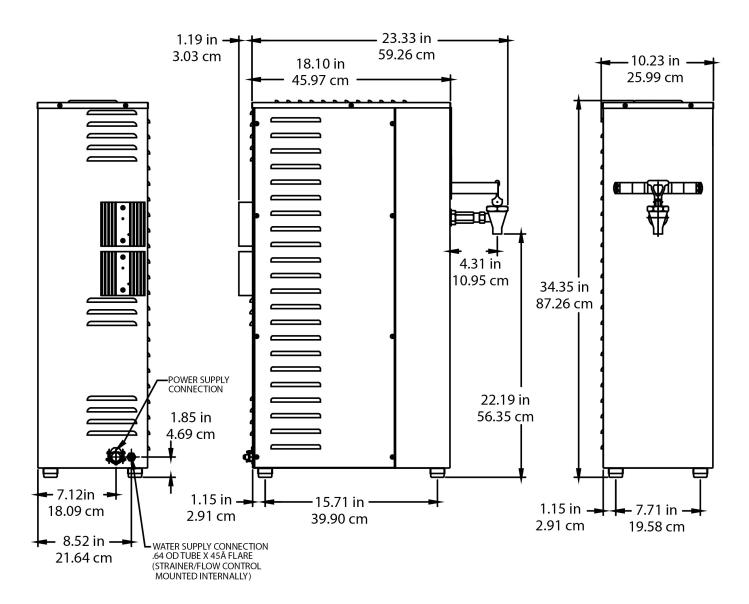

		Unit		Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	34.4 in.	10.2 in.	24.5 in.	39.0 in.	13.6 in.	27.5 in.	-	8.457 ft ³	
Metric	87.4 cm	25.9 cm	62.2 cm	99.1 cm	34.6 cm	69.9 cm	-	0.239 m³	



Related Products & Accessories:H10X(26300.6001)













Serving & Holding Options: H10X(26300.6001)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

