# AXIOM® 4/2 TWIN (4U/2LWarmers)

Height: 19.1" Width: 16.4" Depth: 22.4" (48.5cm) (41.7cm) (56.9cm)





- Adjusts automatically to varying water pressure
- Automatic warmer shut-off
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels
- · Electronic diagnostics and built-in tank drain make service easier
- Large 200oz. (5.9L) tank provides back-to-back brewing capacity
- Ensure coffee quality with programming for brew level, cold brew lock- out and tank temperature, set easily from the front of the machine
- Coffee extraction controlled with programmable pre-infusion, pulse brew and digital temperature precision
- · All stainless steel construction
- Energy-saver mode reduces tank temperature during idle periods
- Hot water faucet
- SplashGard® funnels deflect hot liquids away from the hand
- · Six individually controlled warming stations
- Twin brew head system
- · Servers not included unless otherwise noted

#### Agency:

#### **Specifications**

roduct #: 38700.6014 Faucet: Upper DBC

Water Access: Plumbed Warmers: Four Upper / Two Lower

Finish: Stainless

Funnel: Stainless Steel

### **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
-	-	-	-	-	240	60°F (15.5°C)	-	-	-

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

### Plumbing Requirements

r lambing requirements						
PSI kPa		Fitting Supplied	Water Flow Required (GPM)			
20-90	138-621	3/8" Male Flare Fitting	-			


### **CAD Drawings**


Additional Features


2D	Revit	KLC		
•				


MARNING:







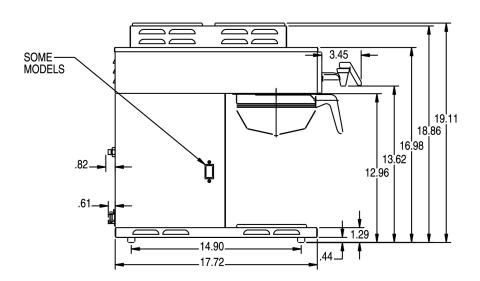



Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	19.1 in.	16.4 in.	22.4 in.	22.4 in.	19.9 in.	25.8 in.	-	6.643 ft <sup>3</sup>
Metric	48.5 cm	41.7 cm	56.9 cm	56.8 cm	50.5 cm	65.6 cm	-	0.188 m³



## Related Products & Accessories: AXIOM® 4/2 TWIN (4U/2LWarmers)(38700.6014)



FUNNEL W/DECAL,PPK NAR BLK(SM)

Product #: 02774.0011



FUNNEL W/DECAL,PPK NAR BLK(LG)

Product #: 04274.0012



STOVE.WX2 120V/200W

Product #: 06310.6000



STOVE,WX1 120V/100W

Product #: 06450.6000



Product #: 20115.6000



FUNNEL ASSY, SST-BLK HDL(7.12

Product #: 20216.0000



FUNNEL ASSY, SST-PP **BLK HNDL** 

Product #: 29151.0000



**FUNNEL ASSY, SST-PP ORANGE HDL** 

Product #: 29151.0001



FUNNEL ASSY, **GOURMET LARGE** 

Product #: 34559.7001



Product #: 39000.0001



Product #: 39000.0004



WATER FILTER, SCALE-PRO

Product #: 39000.0010



SYSTEM, WQ-55(2)5L

Product #: 56000.0001



SYSTEM, WQ-55(2)5

Product #: 56000.0004



PRO.X-150(15)

Product #: 56000.0010



Product #: 56000.0024



SYSTEM, WEQ-10(1.5)5

Product #: 56000.0027



SYSTEM, WEQ-SCALE-PRO.X


Product #: 56000.0033



CARTRIDGE, WQ-55(2)5L

Product #: 56000.0101







# Related Products & Accessories: AXIOM® 4/2 TWIN (4U/2LWarmers)(38700.6014)











# Serving & Holding Options: AXIOM® 4/2 TWIN (4U/2LWarmers)(38700.6014)



EASY POUR®,(BLK) 1/CS

Product #:06100.0101



EASY POUR®,(BLK) 2/CS

Product #:06100.0102



EASY POUR®, (BLK) 3/CS

Product #:06100.0103



EASY POUR®,(BLK) 6/CS

Product #:06100.0106



EASY POUR®,(BLK) 12/

Product #:06100.0112



EASY POUR®,(BLK) 24/

Product #:06100.0124



EASY POUR®,(ORN) 1/ CS

Product #:06101.0101



EASY POUR®,(ORN) 2/

Product #:06101.0102



EASY POUR®,(ORN) 3/

Product #:06101.0103



EASY POUR®,(ORN) 24/ CS

Product #:06101.0124



DECANTER,GLASS-BLK 12C 24/CS

Product #:42400.0024



DECANTER,GLASS-BLK 12CUP 1PK

Product #:42400.0101



DECANTER,GLASS-BLK 12C 3/CS

Product #:42400.0103



DECANTER,GLASS-ORN 12C 24/CS

Product #:42401.0024



DECANTER, GLASS-ORN 12 CUP 1PK

Product #:42401.0101



12C 3/CS

Product #:42401.0103