ITCB-DV, 29 INCH W/TRAY

Height: 35.0" Width: 11.6" Depth: 22.1" (88.9cm) (29.5cm) (56.1cm)





- Sleek modernized design language, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- BUNN Infusion Series technology allows for multiple recipes from one footprint --with three brew buttons and two batch sizes
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- Brews into all BUNN iced tea dispensers (except TDS-5), 1.9 to 3.8 liter airpots, thermal carafes --- and can accommodate BUNN ThermoFresh® Servers [servers not included]
- Includes integrated flip tray that converts to three positions: thermal carafe, airpot and tea dispenser

Additional Features

• Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)

Agency:





Specifications

Product #: 52200.6100 Funnel: Black Plastic BrewWISE

Water Access: Plumbed Interface: Wireless

Finish: Stainless

Electrical & Capacity

Volts*	Amps	Atta			8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	-	-	334	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


The state of the s						
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)			
20-90	138-621	1/4" Male Flare Fitting	1.25			


CAD Drawings

2D	Revit	KLC
•		

MARNING:



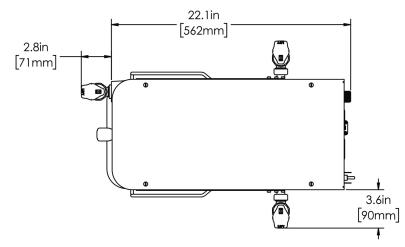

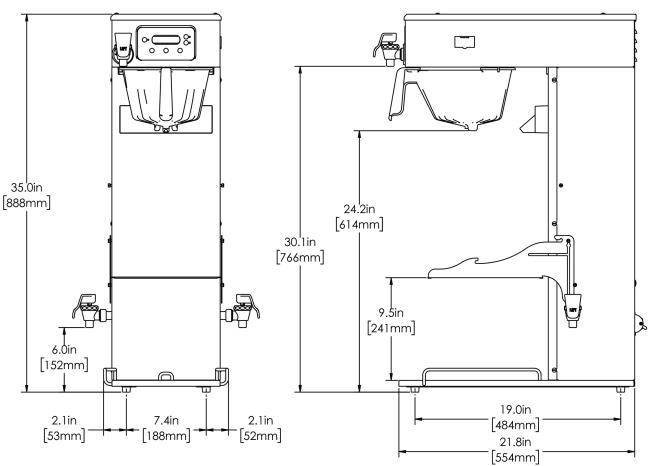

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	35.0 in.	11.6 in.	22.1 in.	38.0 in.	13.3 in.	27.4 in.	47.600 lbs	7.976 ft³	
Metric	88.9 cm	29.5 cm	56.1 cm	96.5 cm	33.7 cm	69.5 cm	21.591 kgs	0.226 m³	



Related Products & Accessories: ITCB-DV, 29 INCH W/TRAY(52200.6100)



FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000

FUNNEL ASSY, TEA NATURAL CDN@

Product #: 53463.7040

FUNNEL ASSY, SMART COFFEE BLK-CLEARED

Product #: 53463.7107

STAND ASSY KIT, TF SERVER

Product #: 54473.1000



Serving & Holding Options: ITCB-DV, 29 INCH W/TRAY(52200.6100)



TD4, SIGHT GAUGE SWT/UNSWT HDL

Product #:03250.0003



TD4T, SIGHT GAUGE NUDGER HDL

Product #:03250.0004



TD4T,BREW THRU LID NUDGER HDL

Product #:03250.0005



TD4, BREW THRU LID SWT/UNSWT HDL

Product #:03250.0006



TD4T, BREW THRU LID NO DECAL NUDGER HDL

Product #:03250.0018



AIRPOT, 2.5L GL PB SINGLE PK

Product #:13041.0001



AIRPOT, 2.5L SST LA SINGLE PK

Product #:32125.0000



AIRPOT, 3.0L SST LA SINGLE PK

Product #:32130.0000



TDS-3, 3 GAL

Product #:33000.0000



TDS-3.5, 3.5 GAL

Product #:33000.0023



TDO-4, RESERVOIR

Product #:34100.0000



TDO-5, RESERVOIR

Product #:34100.0001



TDO-4, RESERVOIR BREW THRU

Product #:34100.0002



TDO-5, RESERVOIR, BREW THRU

Product #:34100.0003



THERMAL CARAFE,ORN 1.9L 1PK

Product #:36252.0001



TDO-N-3.5, RSVR

Product #:39600.0001



TDO-N-3.5, RSVR W/ LIFT HANDLE

Product #:39600.0031



TDO-N-3.5, RSVR W/ PINCH TUBE

Product #:39600.0047



TF SERVER, 1G DSG GEN3 NOBASE

Product #:42700.6250



TD3T-N, RSVR BREW THRU LID BUNN

Product #:43900.0001



Serving & Holding Options: ITCB-DV, 29 INCH W/TRAY(52200.6100)





