ITCB-DV, HV 120V

Height: 35.0" Width: 10.0" Depth: 24.3" (88.9cm) (61.7cm) (25.4cm)



Servers Sold Separately

Specifications

Product #: 52300.6100

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	-	-	336	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

CAD Drawings

	J					
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	3/8" Male Flare Fitting	1.25	•		

MARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 01/26/2022

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.


- Sleek modernized design language, with rounded angles on the corners and trunk
- Brews into 1.5 gallon and 1.0 gallon BUNN Thermofresh servers for coffee, and TD4T, TDO and TDO-N tea dispensers
- · Digital readout displays in English, Spanish, or French --- for easier programming and control
- · BUNN Infusion Series technology allows for multiple recipes from one footprint --with three brew buttons and two batch sizes
- Tea brewing capability built-in with integrated dilution nozzle, software and Quick Brew tea brewing funnel
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
- · Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- · Brew counter keeps track of how many batches are brewed
- · Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- · Includes overlay kit for customization of brewer interface
- · Hot water faucet (supplied for custom installation)

Agency:



Additional Features



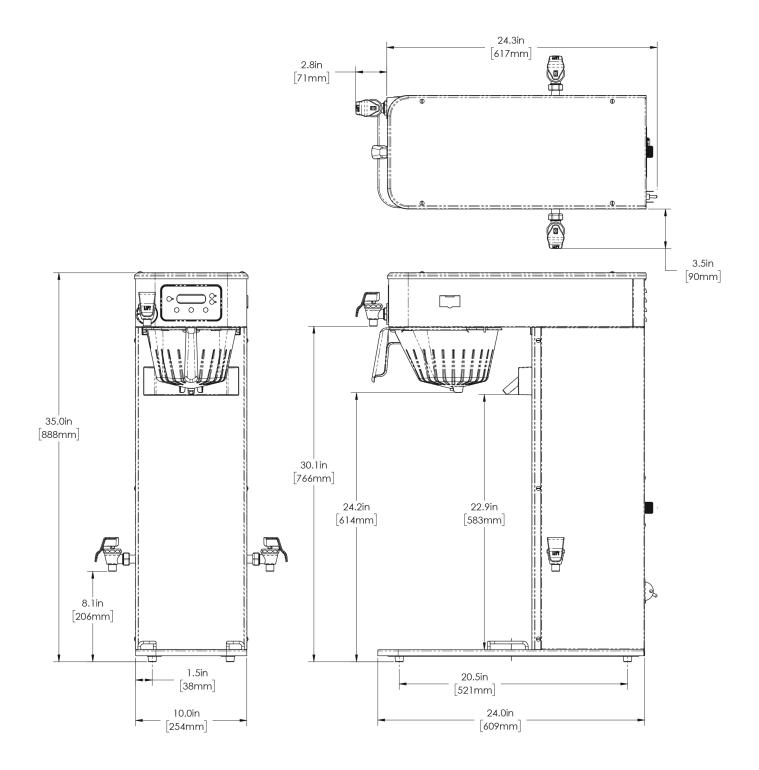

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	35.0 in.	10.0 in.	24.3 in.	38.1 in.	14.3 in.	32.3 in.	58.360 lbs	10.139 ft ³	
Metric	88.9 cm	25.4 cm	61.7 cm	96.8 cm	36.2 cm	81.9 cm	26.472 kgs	0.287 m³	




 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 01/26/2022

 For most current specifications and other info visit bunn.com.
 01/26/2022

Related Products & Accessories: ITCB-DV, HV 120V(52300.6100)

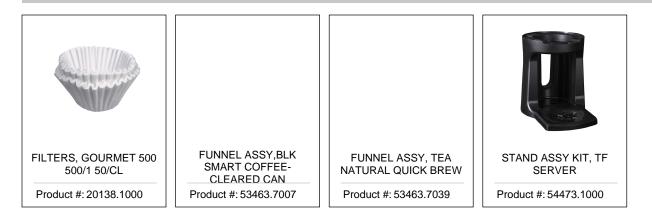



Serving & Holding Options: ITCB-DV, HV 120V(52300.6100)





 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 01/26/2022

 For most current specifications and other info visit bunn.com.
 01/26/2022

Serving & Holding Options: ITCB-DV, HV 120V(52300.6100)



