# ICB-DV, 120V

Height: 26.8" Width: 10.2" Depth: 22.1" (68.1cm) (25.9cm) (56.1cm)



Server(s) sold separately

Specifications

Product #: 53100.6100

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

### **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	-	-	-	60°F (15.5°C)	1	2	60

\*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

## Plumbing Requirements

#### **CAD** Drawings

	<u> </u>				U	
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	3/8" Male Flare Fitting	1.00	•		

MARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 12/15/2022

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

- Sleek modernized design language, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- BUNN Infusion Series technology allows for multiple recipes from one footprint ---with three brew buttons and two batch sizes
- Energy-saver mode reduces tank temperature during idle periods
- The exclusive Peak Extraction® Sprayhead provides improved uniformity of extraction and greater resistance to limescale buildup
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- Hot water faucet (supplied for custom installation)
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)

Agency:


Funnel: Black Plastic





Additional Features

BrewWISE

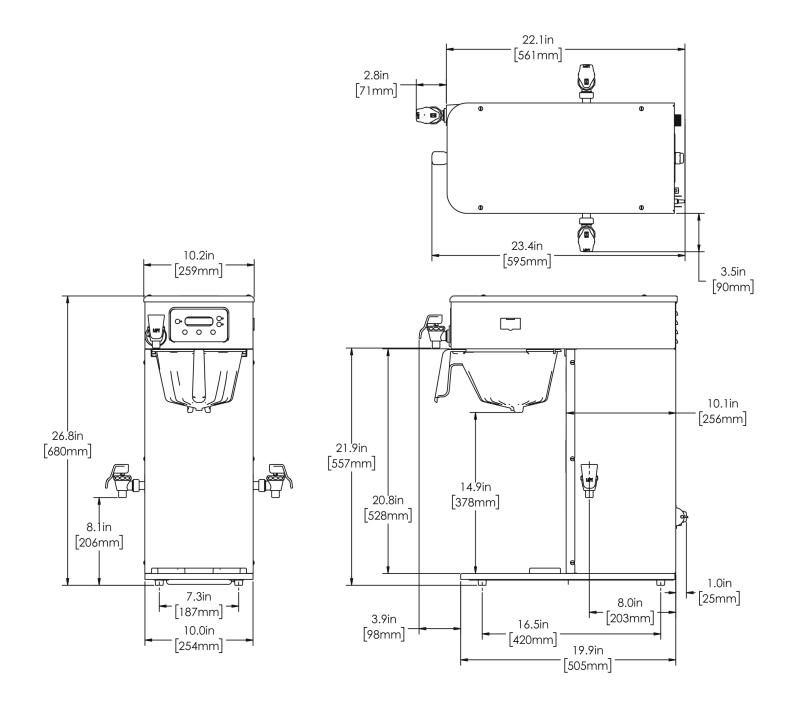

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	26.8 in.	10.2 in.	22.1 in.	34.9 in.	13.3 in.	27.4 in.	46.860 lbs	7.321 ft <sup>3</sup>	
Metric	68.1 cm	25.9 cm	56.1 cm	88.6 cm	33.7 cm	69.5 cm	21.256 kgs	0.207 m³	




 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 12/15/2022

 For most current specifications and other info visit bunn.com.
 12/15/2022

# Related Products & Accessories: ICB-DV, 120V(53100.6100)

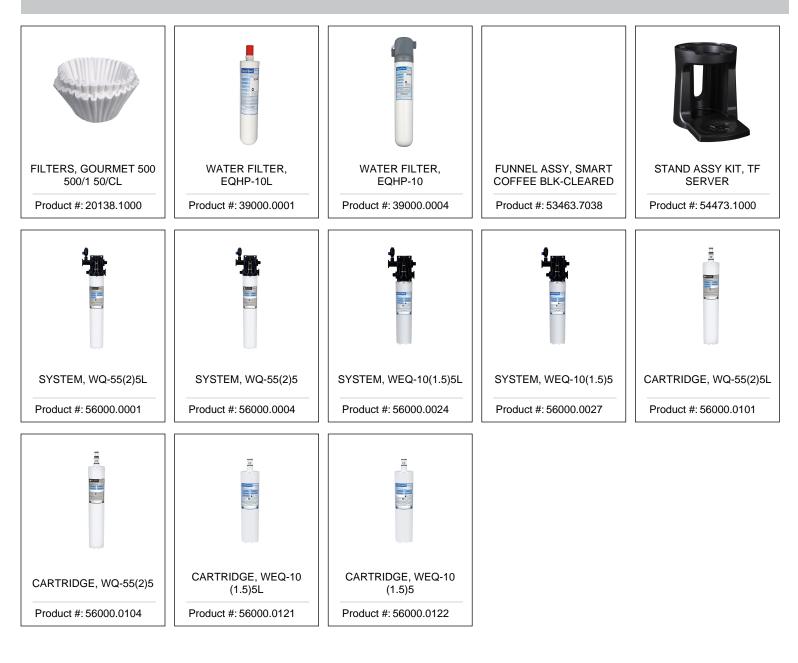



# Serving & Holding Options: ICB-DV, 120V(53100.6100)





TF SERVER, 1G MECH GEN3 NOBASE

Product #:44000.6250



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last U

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 12/15,

 For most current specifications and other info visit bunn.com.
 12/15,