ICB-DV, TALL 120V

Height: 35.0" Width: 10.2" Depth: 22.1" (88.9cm) (25.9cm) (56.1cm)



Server(s) sold separately

Specifications

Product #: 53100.6101

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	-	-	-	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

CAD Drawings

	<u> </u>	O				
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	3/8" Male Flare Fitting	1.00	•		

MARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 01/26/2022

- Sleek modernized design language, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- · BUNN Infusion Series technology allows for multiple recipes from one footprint --with three brew buttons and two batch sizes
- Energy-saver mode reduces tank temperature during idle periods
- The exclusive Peak Extraction® Sprayhead provides improved uniformity of extraction and greater resistance to limescale buildup
- · Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- · Brew counter keeps track of how many batches are brewed
- · Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- Hot water faucet (supplied for custom installation)
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)


Agency:



Additional Features

BrewWISE

Funnel: Black Plastic

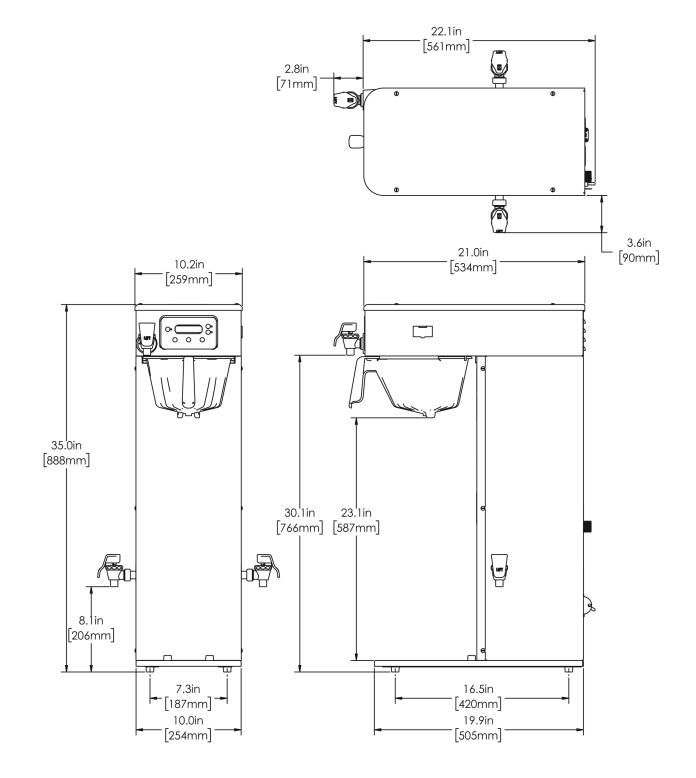

	Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume		
English	35.0 in.	10.2 in.	22.1 in.	38.1 in.	14.3 in.	32.3 in.	46.860 lbs	10.139 ft ³		
Metric	88.9 cm	25.9 cm	56.1 cm	96.8 cm	36.2 cm	81.9 cm	21.256 kgs	0.287 m³		



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
Last Updated:

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
01/26/2022

For most current specifications and other info visit bunn.com.
Control of the second seco

Related Products & Accessories: ICB-DV, TALL 120V(53100.6101)





Serving & Holding Options: ICB-DV, TALL 120V(53100.6101)



BUNN.