ICB-DV PE, 120V

Height: 26.8" Width: 10.2" Depth: 22.1" (68.1cm) (25.9cm) (56.1cm)





- 4.3" Color Touchscreen aides in customizing recipes, brewing options and control
- The Infusion Series® Platinum Edition relies on the powerful duo of the Peak Extraction Sprayhead and SmartWAVE® technology to further enhance the uniformity of extraction and resistance to limescale buildup.
- USB programming for uploading and downloading recipes and software updates, all in less than a minute
- Brews into 2.5 to 3.8L (84 to 128 oz) airpots and 3.8 to 5.7L (1 to 1.5 gallon) baseless Thermofresh servers
- BUNN Infusion Series technology allows for multiple recipes from one footprint
- Energy-saver mode reduces tank temperature during idle periods
- Electronic funnel lock prevents removal of the brew funnel until drip-through is complete
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing
- Hot water faucet (supplied for custom installation)
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)

Additional Features

· Servers not included unless otherwise noted

Agency:





Specifications

Product #: 53300.6100 Funnel: Stainless Steel BrewWISE

Water Access: Plumbed Interface: Wireless Finish: Stainless

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	-	-	-	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


	- 10111101119 1 10 quin 011101110							
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)					
20-90	138-621	3/8" Male Flare Fitting	1.00					


CAD Drawings

2D	Revit	KLC
•		

MARNING:



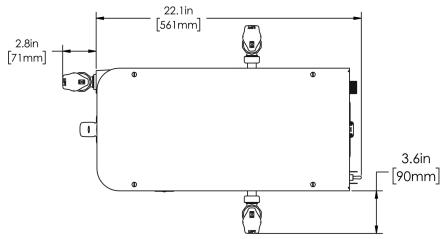

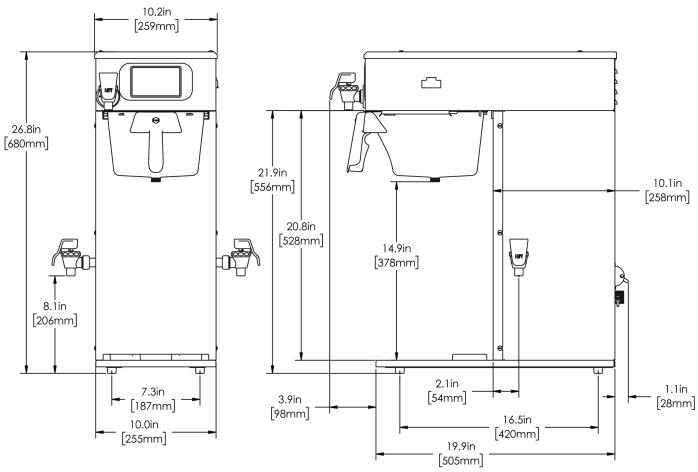

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	26.8 in.	10.2 in.	22.1 in.	34.9 in.	13.3 in.	27.4 in.	53.750 lbs	7.321 ft³	
Metric	68.1 cm	25.9 cm	56.1 cm	88.6 cm	33.7 cm	69.5 cm	24.381 kgs	0.207 m³	



Related Products & Accessories: ICB-DV PE, 120V(53300.6100)



FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000





Serving & Holding Options: ICB-DV PE, 120V(53300.6100)



AIRPOT, 2.5L GL PB SINGLE PK

Product #:13041.0001



AIRPOT, 2.5L GL PB 6/ CASE

Product #:13041.0101



AIRPOT, 2.5L SST LA SINGLE PK

Product #:32125.0000



AIRPOT, 2.5L SST LA 6/ CASE

Product #:32125.0100



AIRPOT, 3.0L SST LA SINGLE PK

Product #:32130.0000



AIRPOT, 3.0L SST LA 6/ CASE

Product #:32130.0100



AIRPOT, 3.8L SST LA SINGLE PK

Product #:36725.0000



AIRPOT, 3.8L SST LA 6/ CASE

Product #:36725.0100



STAND ASSY, TF SERVER

Product #:39795.0003



TF SERVER, 1G DSG GEN3 NOBASE

Product #:42700.6250



TF SERVER, 1G MECH GEN3 NOBASE

Product #:44000.6250

