Height: 26.8" Width: 20.2" Depth: 24.7" (68.1cm) (51.3cm) (62.7cm)





- 4.3" Color Touchscreen aides in customizing recipes, brewing options and control
- SmartWAVE sprayhead technology provides enhanced uniformity of extraction and lime scale reduction
- USB programming for uploading and downloading recipes and software updates, all in less than a minute
- Brews into 2.5 to 3.8L (84 to 128 oz) airpots and 3.8 to 5.7L (1 to 1.5 gallon) baseless Thermofresh servers
- Large 5.6 gallon (21.2L) tank provides back-to-back brewing capacity
- · BUNN Infusion Series technology allows for multiple recipes from one footprint
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
- Electronic funnel lock prevents removal of the brew funnel until drip-through is complete
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing
- Hot water faucet (supplied for custom installation)
- PROP 65 Warning Decal included in packaging with equipment
- A Servers not included unless otherwise noted Agency:





### **Specifications**

Product #: 53400.6100 Funnel: Black Plastic

Water Access: Plumbed
Interface: Wireless

Finish: Stainless

## **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120/240	25	6000	-	-	280	60°F (15.5°C)	1	3	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

#### Plumbing Requirements

<u> </u>						
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)			
20-90	138-621	3/8" Male Flare Fitting	1.00			


#### **CAD Drawings**

Additional Features

2D	Revit	KLC
•		

MARNING:



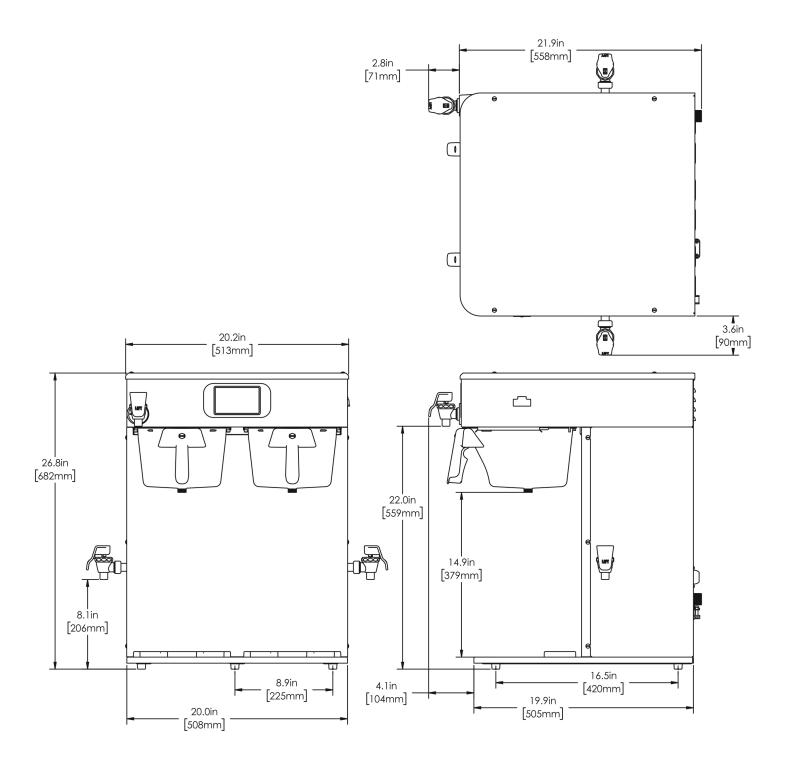

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	26.8 in.	20.2 in.	24.7 in.	-	-	-	-	-
Metric	68.1 cm	51.3 cm	62.7 cm	-	-	-	-	-



# Related Products & Accessories: (53400.6100)





FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000



Product #: 54473.1000



## Serving & Holding Options: (53400.6100)



AIRPOT, 2.5L GL PB SINGLE PK

Product #:13041.0001



AIRPOT, 2.5L GL PB 6/ CASE

Product #:13041.0101



AIRPOT, 2.5L SST LA SINGLE PK

Product #:32125.0000



AIRPOT, 2.5L SST LA 6/ CASE

Product #:32125.0100



AIRPOT, 3.0L SST LA SINGLE PK

Product #:32130.0000



AIRPOT, 3.0L SST LA 6/ CASE

Product #:32130.0100



AIRPOT, 3.8L SST LA SINGLE PK

Product #:36725.0000



AIRPOT, 3.8L SST LA 6/ CASE

Product #:36725.0100



TF SERVER, 1G DSG GEN3 NOBASE

Product #:42700.6250



TF SERVER, 1G MECH GEN3 NOBASE

Product #:44000.6250