#### ITCB-DV HV PE

Height: 35.0" Width: 10.0" Depth: 24.3" (88.9cm) (25.4cm) (61.7cm)





- Produce fresh cold brew in minutes with the new Cold Brew mode, enabling operators to brew an on-demand batch of concentrate or ready-to-drink cold brew quickly and consistently with operational ease
- Add Bubble Tea to the menu with the new Bubble Tea Kit (54165.1018)
- 4.3" Color Touchscreen aids in customizing recipes, brewing options and control
- The QWERTY key pad feature allows for easy customization of recipe names in English, Spanish and French
- SmartWAVE sprayhead technology provides enhanced uniformity of extraction and lime scale reduction
- Customers can easily add up to 10 screensaver images to advertise and promote their brand and products
- Brews into 1.5 gallon and 1.0 gallon BUNN ThermoFresh® servers for coffee and TD4T, TDO and TDO-N tea dispensers
- Includes both coffee (Stainless) and tea (Plastic) funnels
- Tea brewing capability built-in with integrated dilution nozzle, software and Quick Brew tea brewing funnel
- BrewWISE® intelligence with pre-infusion and pulse brew for maximum flavor extraction
- Energy-saver mode reduces tank temperature during idle periods
- Large 3gal (11.4L) tank provides back-to-back brewing capacity

#### Agency:





### **Specifications**

Product #: 54000.6100 Funnel: Stainless Steel

Water Access: Plumbed Funnel: Translucent Tea Funnel

Interface: Wireless
Finish: Stainless

#### Additional Features

### **Electrical & Capacity**

Volts*	/olts* Amps 120 14	Attached			236ml cups/hr			plus Ground	Hertz 60
Volts*					8oz cups/hr	Input H <sup>2</sup> O	Phase	# Wires	Hertz

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

#### Plumbing Requirements


PSI	kPa	Fitting Supplied	Water Flow Required (GPM)				
20-90	138-621	3/8" Male Flare Fitting	1.25				

#### **CAD Drawings**

2D	Revit	KLC
•		

MARNING:



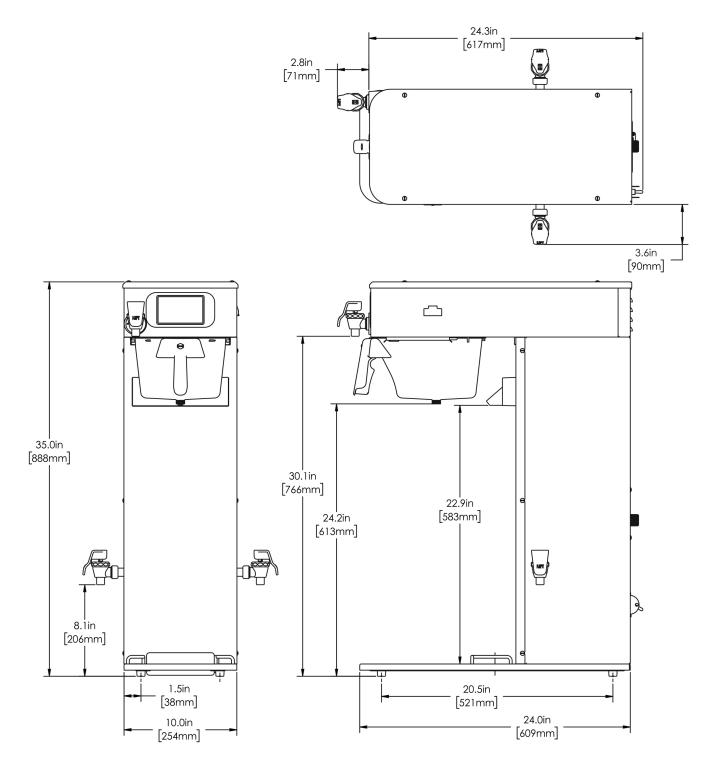

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	35.0 in.	10.0 in.	24.3 in.	38.1 in.	14.3 in.	32.3 in.	78.400 lbs	10.139 ft³
Metric	88.9 cm	25.4 cm	61.7 cm	96.8 cm	36.2 cm	81.9 cm	35.562 kgs	0.287 m³



### Related Products & Accessories: ITCB-DV HV PE(54000.6100)



FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000



NON-LOCKING STAND ASSY, TF SERVER GEN3

Product #: 39795.0200



STAND ASSY KIT, TF SERVER

Product #: 54473.1000



## Serving & Holding Options: ITCB-DV HV PE(54000.6100)



TD4T, SIGHT GAUGE NUDGER HDL

Product #:03250.0004



TD4T,BREW THRU LID NUDGER HDL

Product #:03250.0005



TD4T, BREW THRU LID NO DECAL NUDGER HDL

Product #:03250.0018



AIRPOT, 2.5L SST LA 6/ CASE

Product #:32125.0100



AIRPOT, 3.0L SST LA SINGLE PK

Product #:32130.0000



AIRPOT, 3.0L SST LA 6/ CASE

Product #:32130.0100



TDS-3, 3 GAL

Product #:33000.0000



TDS-3.5, 3.5 GAL

Product #:33000.0023



TDO-4, RESERVOIR

Product #:34100.0000



TDO-5, RESERVOIR

Product #:34100.0001



TDO-4, RESERVOIR BREW THRU

Product #:34100.0002



TDO-5, RESERVOIR, BREW THRU

Product #:34100.0003



THERMAL CARAFE,ORN 1.9L 12PK

Product #:36252.0000



THERMAL CARAFE,ORN 1.9L 1PK

Product #:36252.0001



AIRPOT, 3.8L SST LA SINGLE PK

Product #:36725.0000



CASE

Product #:36725.0100



TDO-N-3.5, RSVR

Product #:39600.0001



TDO-N-4.0, RSVR BUNN

Product #:39600.0002



TDO-N-3.5, RSVR W/ LIFT HANDLE

Product #:39600.0031



TDO-N-3.5, RSVR W/ PINCH TUBE

Product #:39600.0047

# Serving & Holding Options: ITCB-DV HV PE(54000.6100)



TF SERVER, 1G DSG

Product #:42700.6200



TF SERVER, 1.5G DSG GEN3

Product #:42750.6200



TD3T-N, RSVR BREW THRU LID BUNN

Product #:43900.0001



Product #:43900.0002



TF SERVER, 1G MECH GEN3

Product #:44000.6200



GEN3

Product #:44050.6200