ITCB TWIN HV PE, 120/240V

Height: 35.0" Width: 20.2" Depth: 24.0" (88.9cm) (61.0cm) (51.3cm)



Server(s) sold separately

Specifications

Product #: 54100.6100

Water Access: Plumbed

Finish: Stainless

Funnel: Stainless Steel

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H²O Temp.	Phase	# Wires plus Ground	Hertz
120/240	25	6000	-	-	280	60°F (15.5°C)	1	3	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

CAD Drawings

	J 1					
PSI	PSI kPa Fitting Supplied		Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	3/8" BSPP	1.25	•		

MARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 04/07/2023


the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

- Produce fresh cold brew in minutes with the new Cold Brew mode, enabling operators to brew an on-demand batch of concentrate or ready-to-drink cold brew quickly and consistently with operational ease
- Add Bubble Tea to the menu with the new Bubble Tea Kit (54165.1018)
- 4.3" Color Touchscreen aides in customizing recipes, brewing options and control
- SmartWAVE sprayhead technology provides enhanced uniformity of extraction and lime scale reduction
- · Customers can easily add up to 10 screensaver images to advertise and promote their brand and products
- Brews into 1.5gal and 1.0gal BUNN ThermoFresh® servers for coffee and TD4T, TDO and TDO-N tea dispensers
- · Includes both coffee (Stainless) and tea (Plastic) funnels
- Tea brewing capability built-in with integrated dilution nozzle, software and Quick Brew tea brewing funnel
- · BrewWISE® intelligence with pre-infusion and pulse brew for maximum flavor extraction
- · Energy-saver mode reduces tank temperature during idle periods
- Large 5.6gal (21.2L) tank provides back- to-back brewing capacity at 120/208-240V applications
- · Brews coffee or tea on both sides Mix and Match to meet your needs

Agency:



Additional Features

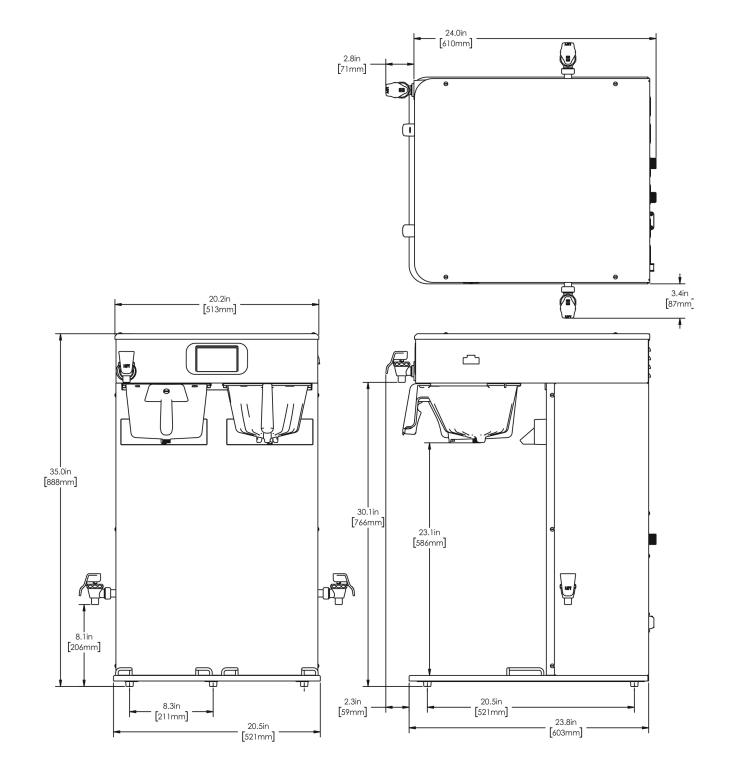

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	35.0 in.	20.2 in.	24.0 in.	38.3 in.	24.4 in.	28.6 in.	74.690 lbs	15.411 ft ³	
Metric	88.9 cm	51.3 cm	61.0 cm	97.2 cm	61.9 cm	72.6 cm	33.879 kgs	0.436 m³	




 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 04/07/2023

 For most current specifications and other info visit bunn.com.
 04/07/2023

Related Products & Accessories: ITCB TWIN HV PE, 120/240V(54100.6100)

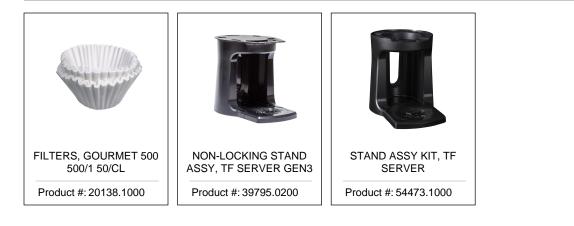



Serving & Holding Options: ITCB TWIN HV PE, 120/240V(54100.6100)





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Serving & Holding Options: ITCB TWIN HV PE, 120/240V(54100.6100)



TF SERVER, 1G DSG GEN3

Product #:42700.6200



TF SERVER, 1.5G DSG GEN3

Product #:42750.6200



TD3T-N, RSVR BREW THRU LID BUNN

Product #:43900.0001



TD3T-N, RSVR SOLID LID BUNN

Product #:43900.0002



Product #:44000.6200



GEN3 Product #:44050.6200

