### CARTRIDGE, WQ-18(2).2C

Height: 17.21" Width: 3.56" Depth: 3.56" (43.7cm) (9.0cm) (9.0cm)

- Designed for low to medium volume applications rated up to 18,000 gallons of use to reduce chlorine taste & odor and chloramines
- Protects downstream equipment with exceptional sediment holding capacity and reduces health contaminants such as cyst with 0.2 Microns mechanical filtration
- Certified to NSF Standard 53 for Cyst and Standard 42 for Sediment, Chlorine Taste and Odor reduction



NOTE: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

#### Agency:



## **Specifications**

Systems and other related parts are certified to NSF International NSF/ANSI Standard 42 and/or NSF International NSF/NANSI Standard 53 as marked.

Product #: 56000.0139 Cartridge Type: Quick Change

Application(s): Replacement Cartridge:

Filtration Type: Filter Change Frequency: Annual

#### Capacity


| Micron Rating | Service Flow Rate       | Water Filter Capacity<br>Chlorine Reduction | Water Filter Capacity<br>Chloramine Reduction | Water Filter Capacity<br>Softening |
|---------------|-------------------------|---|---|------------------------------------|
| 0.2           | 1.6 gal/min (6.1 L/min) | -   | 18000 gal. (68136.2 L)                        | -                                  |

## Plumbing Requirements

| Inlet Connection | Outlet Connection | Min Operating<br>Pressure | Max Operating<br>Pressure | Min Operating<br>Temperature | Max Operating<br>Temperature |  |
|------------------|-------------------|---------------------------|---------------------------|------------------------------|------------------------------|--|
|                  |                   | 20 psi (138 kPa)          | 125 psi (862 kPa)         | 40°F(4°C)                    | 100°F(38°C)                  |  |

MARNING:



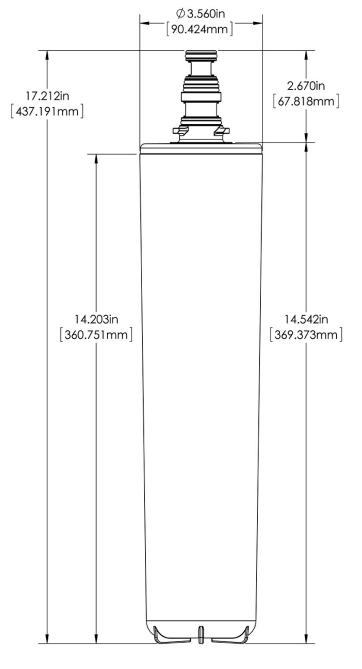

| Dimensions of Filter System<br>(filter head with filter cartridge) |        |       |       |        | stalled Dimension |       | Cartridge Dimensions<br>(filter cartridge only) |          |          |
|--|--------|-------|-------|--------|-------------------|-------|---|----------|----------|
|  | Height | Width | Depth | Height | Width             | Depth | Height  | Width    | Depth    |
| English  | -      | -     | -     | -      | -                 | -     | 17.21 in.                                       | 3.56 in. | 3.56 in. |
| Metric   | -      | -     | -     | -      | -                 | -     | 43.7 cm   | 9.0 cm   | 9.0 cm   |

| Weight  |         |         |        | Shipping |       |           |        |  |
|---------|---------|---------|--------|----------|-------|-----------|--------|--|
|         | Dry     | Wet     | Height | Width    | Depth | Weight    | Volume |  |
| English | 0.0 lbs | 0.0 lbs | -      | -        | -     | 2.420 lbs | -      |  |
| Metric  | -       | -       | -      | -        | -     | 1.098 kgs | -      |  |

WARRANTY: BUNN High Performance Water Filtration Solutions Systems by BUNN® (excluding water filters and water treatment replacement cartridges) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase, under normal use and service, and when installed in accordance with manufacturer's recommendations outlined in the filtration systems owner's manual. BUNN replaceable elements (water treatment cartridges, filter elements, and feeder elements) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase or the remainder of the original warranty, whichever is longer. See printed warranty for full details. BUNN will provide a copy of the warranty upon request.



## Related Products & Accessories: CARTRIDGE, WQ-18(2).2C(56000.0139)







# Model Compatibility: CARTRIDGE, WQ-18(2).2C(56000.0139) \*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*

