

Pourover Coffee Brewer with 2 Warmers

ITEM#	
PROJECT	

DATE



Features

Low Profile Pourover Coffee Brewer

- Brews 3.8 gallons (14.4 liters) of perfect coffee per hour.
- Pourover brewer requires no plumbing completely portable.
- · Consistently brews perfect coffee.
- · All stainless steel construction.
- · Stainless steel or black decor.
- Two separately controlled warmers.
- SplashGard® funnel deflects hot liquids away from the hand.
- International electrical configurations available.

Model VP17-2 BLK

(decanters not included)
Dimensions: 18.9" H x 8.5" W x 17.8" D
(48cm H x 21.6cm W x 45.2cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Paper Filter Pack

Product No.: 20115.6000 Packed per case: 1,000

Dimensions: 41/4" Base x 23/4" Sidewall 10.8 cm Base x 6.98 cm Sidewall WX1-warmer

Product No.: 06450.6000 One position warmer



Easy Pour® black decanter

Product No.: 06100.0201 Quantity: 1 (also packaged in quantities of 3 & 24)



WX2-warmer

Product No.: 06310.6000 Two position warmer

er Bunn II

Easy Pour® orange decanter (for decaf)

Product No.: 06101.0201 Quantity: 1 (also packaged in quantities of 3 & 24)



Model	Agency Listing	
VP17-2 SST	®	
VP17-2 BLK	<u> </u>	

Dimensions & Specifications






Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Capacity per hour	Cubic ft³/m³	Weight lbs/kg	Cord Attached
VP17-2 SS	13300.6003	120	11.3	1150	1350	3.8 gal/14.4 liter	3 /.08	23 /10.4	Yes*
VP17-2 BLK	13300.6002	120	11.3	1150	1350	3.8 gal/14.4 liter	3 /.08	22 /10.0	Yes*

^{*}Power cord (NEMA 5-15P) 15 Amp-120V machine only.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: Models require 2-wires plus ground service rated 120V, single phase, 60 Hz.

Plumbing: No plumbing needed.

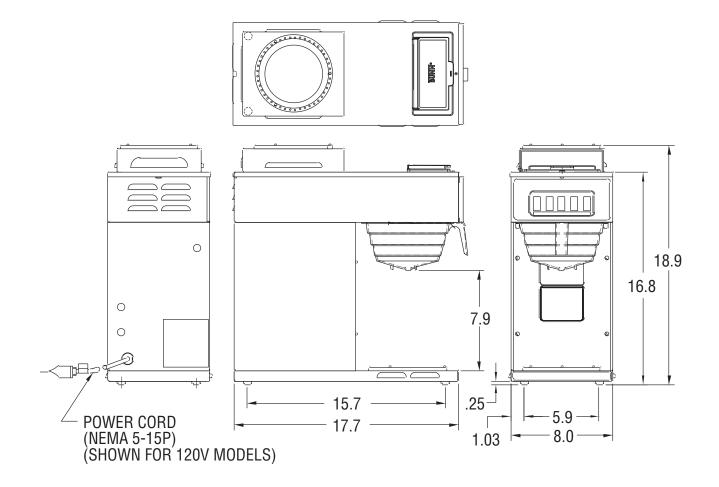

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com