

ITEM#

PROJECT

Liquid Coffee RefrigeratedDispenser

DATE



Model LCR-2C

Dimensions: 38" H x 12.2" W x 24.9" D (96.5 cm H x 31 cm W x 63.2 cm D)

Features

Liquid Coffee Refrigerated Dispenser

- · Refrigerated product cabinet extends product flavor profile, maintains 38°-42°F in product compartment.
- Attractive appearance and narrow (12") width.
- Dispense over 125 5 oz. cups per hour with a 120 volt, 20 amp electrical connection or over 500 - 5 oz. cups per hour with a 240 volt / 30 amp electrical connection.
- Accommodates all ½ gallon and most 1 gallon bag-in-box (BIB) containers.
- · Refill or rinse LED lights alert the operator for concentrate or cleaning.
- Global multi-volt design is easily converted to ratings from 100 to 240 volts (50-60 hertz) eliminating the need to inventory multiple electrical configurations.
- FlavorGard[™] technology continuously monitors extract-to-water ratio and assures flavor consistency.
- · Easy-to-program one touch portion control model is available for self-serve applications.



Model LCR-2C, PC

LCR is also available with portion control

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-10 Product No.: 39000.0004

Easy Clear® EQHP-10L Product No.: 39000.0001

Easy Clear® EQHP-25 Product No.: 39000.0005

Easy Clear® EQHP-25L Product No.: 39000.0002




1/8" Replacement tube kits

Product No.: 34728.1000

3/16" Replacement tube kits Product No.: 34727.1000



Scholle BIB connector







Patents Apply

LiquiBox QC/D II **BIB** connector

Product No.: 35055.0000





Model **Agency Listing** LCR-2C CUL) US LISTED

Dimensions & Specifications





Model	Product Number Product	1.8 oz.	Rate/Sec. 2.5 oz.*	Connector Type	Volts	Amps	Htr Watts	Capacity** per hour	Cubic ft³/m³	Weight Ibs/kg /	Cord Attached
LCR-2C	34400.6044†	45:1-100:1	65:1-100:1	Scholle	120	14.2	1500	125 cups	10.9 /.309	114 / 51.7	Yes***
LCR-2C	34400.6047†	25:1-45:1	25:1-65:1	LiquiBox QC/D II	120	14.2	1500	125 cups	10.9 /.309	114 / 51.7	Yes***
†All models can be changed to these electrical configurations.					208	25.8	4500	385 cups	10.9 /.309	114 / 51.7	No
					240	25.8	6000	512 cups	10.9 /.309	114 / 51.7	No
LCR-2C	PC36500.6044 [†]	45:1-100:1	65:1-100:1	Scholle	120	14.2	1500	125 cups	10.9 /.309	114 / 51.7	Yes***
LCR-2C	PC36500.6047 [†]	25:1-45:1	25:1-65:1	LiquiBox QC/D II	120	14.2	1500	125 cups	10.9 /.309	114 / 51.7	Yes***
[†] All models can be changed to these electrical configurations.					208	25.8	4500	385 cups	10.9 /.309	114 / 51.7	No
					240	25.8	6000	512 cups	10.9 /.309	114 / 51.7	No

^{*}Unit shipped with dispense rate set at 1.8 oz./sec. Dispense rate increases to 2.5 oz./sec. if restrictor plug is removed.


(30 amp cord and plug needed for 208V and 240V models

Electrical: 120V model requires 2-wires plus ground service rated 120V, single phase, 60 hz.

Plumbing: 20-90 psi (138-621 kPa) from a 3/8" (10 mm) or larger supply line. Unit requires a 2.2 gpm line flow capacity. A shut-off

valve should be installed in the line before the unit. Install a regulator in line when pressure is greater than 90 psi to re-

duce pressure to 50 psi. Supplied with 3/8" (10 mm) male flare fitting.

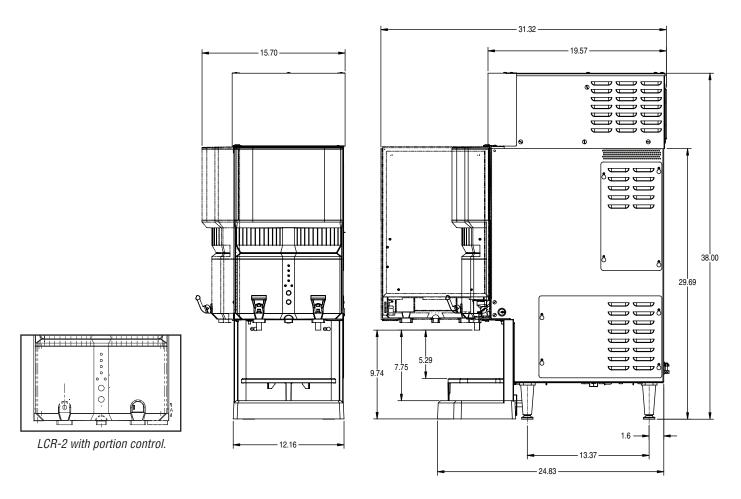

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

^{**}Capacity measured with a 5 oz. cup. ***Power cord (NEMA 5-20P) 20 Amp-120V machine only.