



## HOTEL/MOTEL ICE DISPENSERS

ICE  
DISPENSER

**ID-H150-22**  
**ID-H250-30**

### HOTEL / MOTEL

#### KEY FEATURES:

- ID-H150-22: Accepts 22" wide Icetro modular ice machines 141 lbs of ice storage capacity per day
- ID-H250-30: Accepts 30" wide Icetro modular ice machines 247 lbs of ice storage capacity per day
- ADA compliant
- Push button to dispense ice (standard)
- Room key slot (option) (IBO-HDRKIT)
- Water dispenser kit (option) (IBO-HDWKIT)
- UV light on when dispensing ice
- Always on LED ambient light
- Easy to remove front panel for cleaning without moving Ice machines
- ID-H150-22: Accommodates Icetro ice machines, IM-0350-AC/AH-22, IM-0460-AC/AH-22, and IM-0550-AC/AH-22
- ID-H250-30: Accommodates Icetro ice machines, IM-0350-AC/AH, IM-0460-AC/AH/WC/WH, and IM-0550-AC/AH/WC/WH
- 22" wide ice machine on 30" wide dispensers require IBT-2230BV bin adapter
- Power cord with NEMA 5-15 plug

OPERATING LIMITS	MIN	MAX
AMBIENT TEMP RANGE	50 °F	100 °F
WATER TEMP RANGE	50 °F	90 °F
WATER PRESSURE	20 psi (1.38 bar)	80 psi (5.52 bar)

※ Dispensers have no clearance or operating limits.  
Please follow the clearance and operating requirements for the ice machine installed on top of the dispenser.

#### CERTIFICATIONS



ID-H150-22 shown with IM-0550-AH-22  
ID-H250-30 shown with IM-0550-AH  
(Ice machine sold separately)

Hotel Dispensers		
Product Image		
Models	ID-H150-22	ID-H250-30
Ice Type	Cube or Half-Cube only	
Storage Capacity (lbs.)	141	247
Dimensions (in.) W x H x D	22.5 x 33.3 x 51.5	30 x 33.3 x 51.5
Wt. (net/shipping) (lbs.)	187 / 230	207 / 256

#### ICE SHAPE: Cube & Half Cube

(Choose Cube type when selecting ice machine: C = Cube, H = Half Cube)



Cube  
7/8" x 7/8" x 7/8"  
(2.22 x 2.22 x 2.22 cm)



Half Cube  
3/8" x 1 1/8" x 7/8"  
(.95 x 2.86 x 2.22 cm)

#### STANDARD WARRANTY:

- 3-Year Parts & Labor

#### RECOMMENDED WATER FILTRATION:

- IcePro 500




# HOTEL/MOTEL ICE DISPENSERS

## SPECIFICATIONS


Model	Ice Storage Capacity	Dispensing Gear motor	Dispensing Rate / minute	Electrical (V / Hz / ph)	Motor Amperage (Max, A)	Maximum Circuit Breaker (A)
ID-H150-22	141 lbs	60 W	18 lbs	115 / 60 / 1	1.4	15
ID-H250-30	247 lbs	100 W	10 lbs	115 / 60 / 1	2.7	15

## PLAN VIEWS:

### ID-H150-22

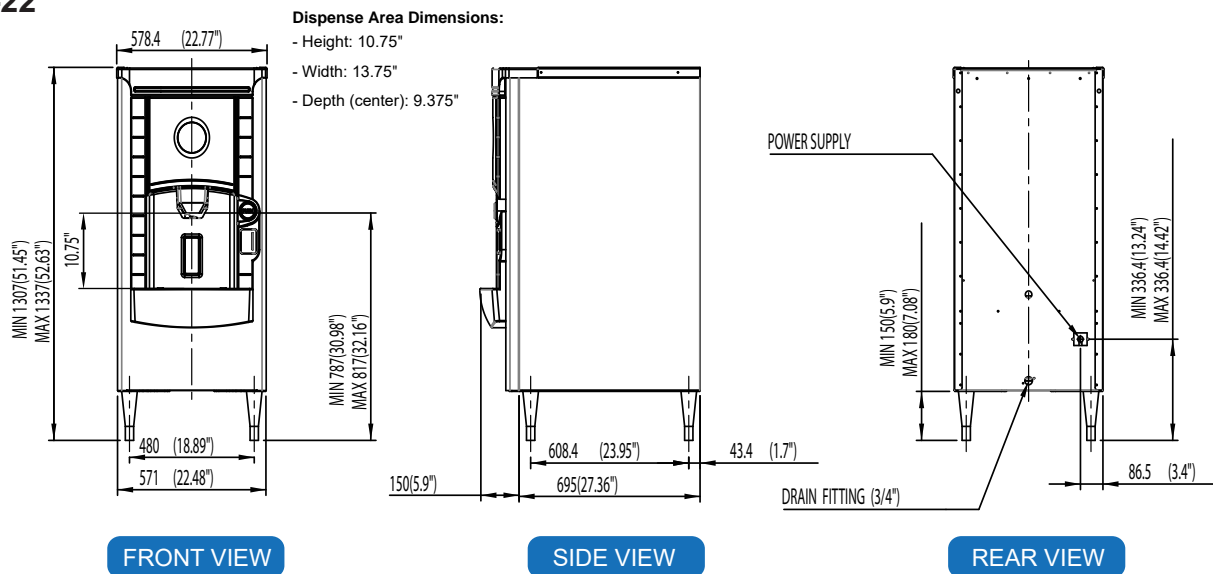

### ID-H250-30

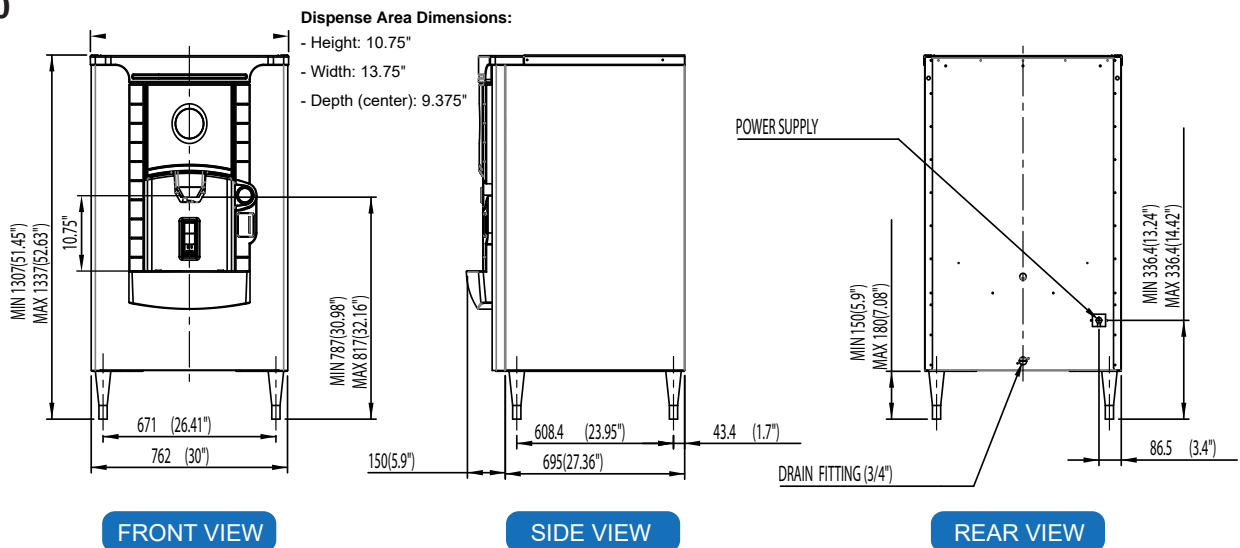

\* Design and specifications are subject to change without prior notice.