Braising Pans / Tilting Skillets

Cleveland

MINI MVP TILT SKILLET

ELECTRIC TABLE TYPE, RECTANGULAR, 10 GALLON (40 LITER) WORKING CAPACITY

Project
Item
Quantity
FCSI Section 11400
Approved
Date

Models • SET-10





Short Form Specifications

Shall be CLEVELAND 10 Gallons (40 liters) Model SET-10 KW mini tilt skillet of type 304 Stainless Steel Construction, with #4 Finish. Electric Heating Elements cast integrally onto 1.25"/ 32mm thick aluminum blocks and securely clamped beneath cooking surface. Bead-Blast-Textured Cooking Surface. Complete with Thermostatic, Safety and Main Power Controls with Lighted Indicators. For Table Top Mounting. Spring Assist Cover.

Standard Features


- Heating Element are cast integrally into 1.25" (32mm) thick aluminum blocks which are securely camped to the underside of the cooking surface, providing even heat distribution and energy efficiency with rapid heat-up
- Stainless Steel Cooking Surface is structurally braced to prevent warping
- Meets IPX6 water rating guidelines
- Bead-blast Textured Cooking Surface Finish to reduce sticking
- Heavy Duty Stainless Steel Construction, with #4 Finish
- Easydial style controls with time and temperature controls and display, 3 cooking modes, built-in diagnostics and removable core temperature probe
- Solid State Temperature Control conveniently located in a Drip Proof Side Console. Temperature Controlled from 190°F (88°C) to 425°F (220°C)
- Sanitary Base Mounting for Table Top or Stand Mounted Installation
- · Standard 208 Volts, 60 Hz, 3 Phase, 3 Wire
- Spring Assist Cover
- · Removable Core Temperature Probe
- Typical approvals include UL, CSA, CE and NSF
- 12 gallon (45 liter) capacity to rim, 10 gallon (40 liter) working capacity

Options & Accessories

- Poaching Pans (PP)
- Vegetable Steamer (VS)
- Double or Single Water Faucet with Swing Spout (DPK24) or (SPK24)
- Stainless Steel Support Stands (ST28) with Sliding Drain Drawer and Splash Screen
- · Single phase option (SPH)
- Food Strainer (SF10)
- Fry Baskets (FB10) (1 each)
- 1.5" Tangent Draw-off (38mm) (TD1.5)
- 240 volt, 60 Hz., 3 phase (VOSK1)
- 340-415 volt, 50 Hz., 3 phase (VOSK2)

KE004046-90

Cleveland

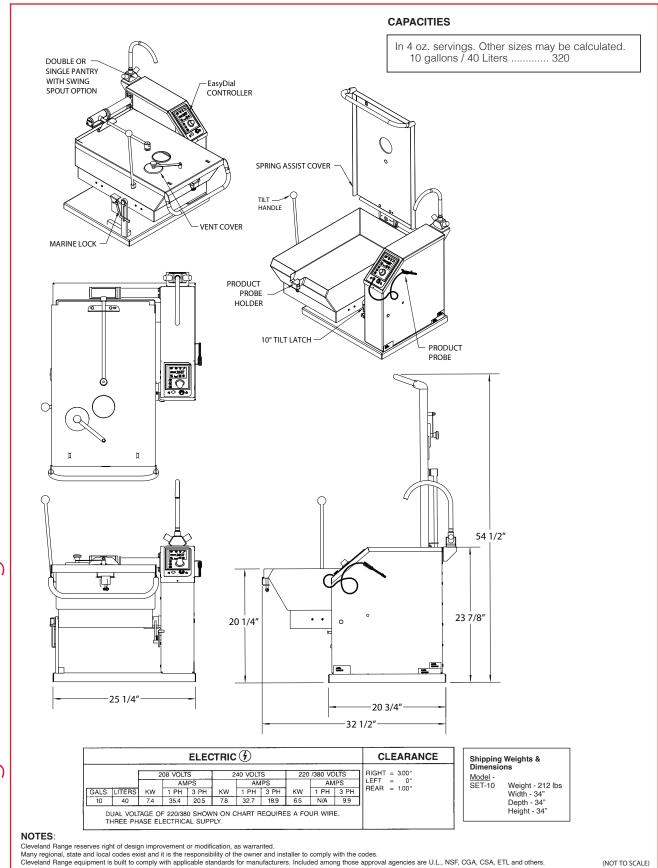

5671A 07 / 2022