



SHORT SIDE NON-REFRIGERATED COLD PAN DROP-IN



Short Side Non-Refrigerated Cold Pan Drop-in

DESCRIPTION

The short side non-refrigerated cold pans are designed for top-mount installation.

A full-perimeter drip edge contains spills and condensation within the stainless steel countertop area of the drop-in.

High-density polyurethane foam insulation surrounds the exterior of the well to provide better temperature maintenance and hold ice longer.

The deep display well provides maximum capacity for ice, essential for optimum presentation and performance. The seamless well is designed for maximum capacity.

Project:

Item Number:

Quantity:

ITEMS

- 36654 Two Pan (US/Canada)
- 36657 Three Pan (US/Canada)
- 36660 Four Pan (US/Canada)

FEATURES

- Top is 18-gauge stainless steel, 18-8 Type 304, with $\frac{3}{8}$ " (9.5 mm) overhang on all sides and die stamped with full-perimeter drip edge.
- Molded breaker gasket fitted under drip edge.
- Flat work surface around opening.
- Exterior housing is 18-gauge galvanized steel.
- Seamless well is 18-gauge 18-8 Type 304 stainless steel.
- 1" (2.5 cm) integral drain.
- Inner well assembly is insulated with foamed in place polyurethane foam insulation.
- Positioning clip provided to center drop-in within cutout.
- Full one-year parts and labor warranty.
- **Optional** To replace drip free flange with flat flange, add "-FF" to item number.

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to www.Vollrath.com.

Agency Certifications



Due to continued product improvement, please consult www.vollrath.com for current product specifications.

Approvals	Date



www.vollrath.com


The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462

SHORT SIDE NON-REFRIGERATED COLD PAN DROP-IN

DIMENSIONS Inches (cm)

Opening cutout must have a $\frac{7}{8}$ " (2.22 cm) corner radius.

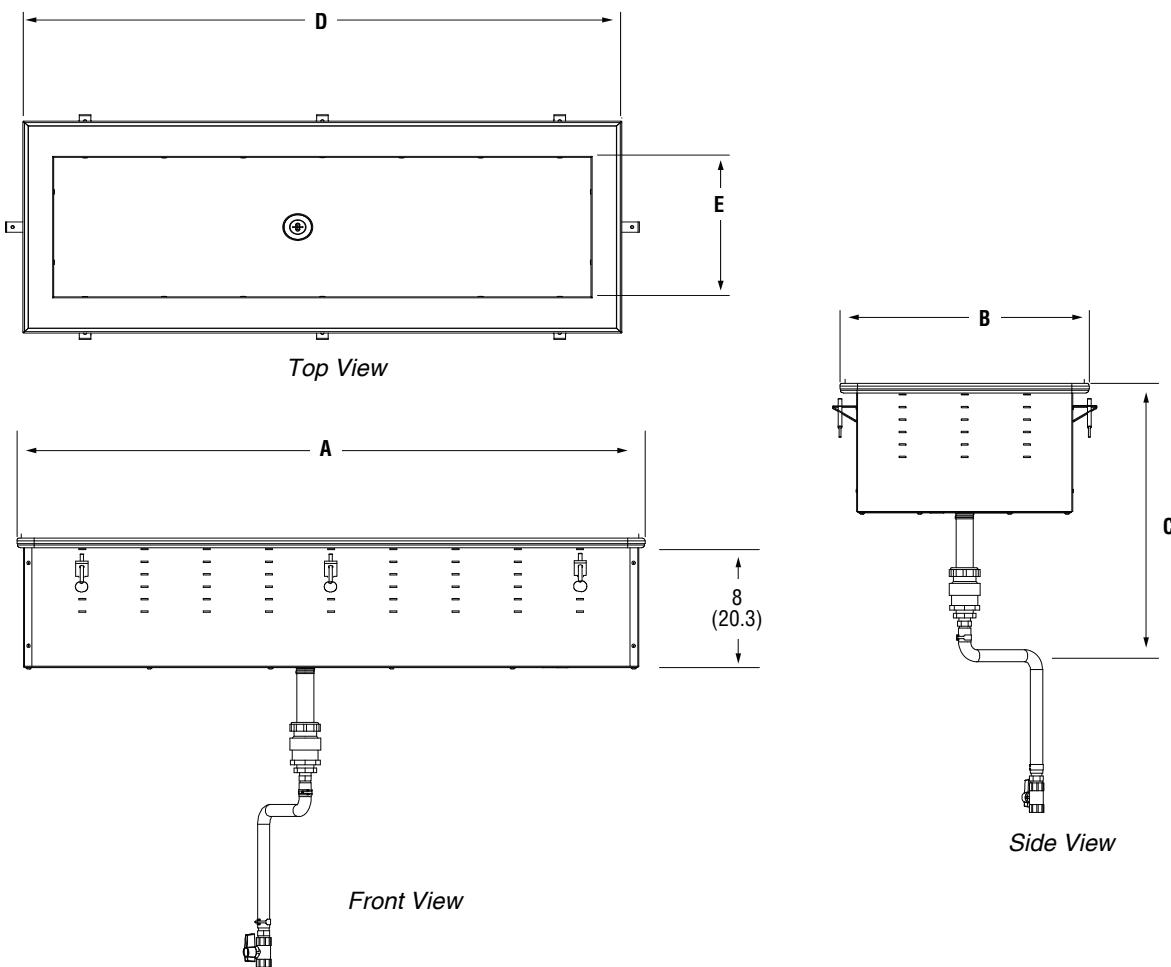

SPECIFICATIONS

Item	(A) Overall Length	(B) Overall Width	(C) Overall Height	(D) Well Length	(E) Well Width	Cutout	
						Length	Width
36654	45 $\frac{7}{16}$ (115.4)	18 (45.7)	17 $\frac{15}{16}$ (45.6)	40 $\frac{3}{4}$ (103.5)	12 (30.5)	44 $\frac{3}{4}$ (113.7)	17 $\frac{1}{4}$ (44.2)
36657	66 $\frac{7}{8}$ (169.8)			61 $\frac{1}{2}$ (156.2)		66 $\frac{3}{16}$ (168.1)	
36660	88 $\frac{1}{4}$ (224.2)			82 $\frac{1}{4}$ (208.9)		87 $\frac{5}{8}$ (222.6)	



www.vollrath.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462