

TempStar® FL-VER

Front-loading Ventless High Temperature Sanitizing
Door-type Dishwasher with Energy Recovery

Standard Features

- Ventless: does not require a hood
- Energy Recovery System
- Door interlock keeps door locked during cycle
- Cold water connection only
- Built-in 70 °F rise booster heater with Sani-Sure™ final rinse system ensures proper rinse water temperature
- Automatic tank fill
- Door-actuated start
- Four (4) selectable timed cycles
- Top mounted controls
- Delime/manual wash mode
- 15 5/8" (397 mm) vertical chamber clearance
- Specially designed stainless steel nozzles provide superior cleaning action
- Interchangeable upper and lower wash/rinse arms
- 1 HP self-draining stainless steel wash pump motor
- Vent fan control shuts vent fan off when machine is idle
- Large scrap basket
- Pressure regulator is provided for installation by others
- Single point connections for all utilities
- Field convertible from 3-phase to single phase and vice versa (kit required)
- Low watt density electric wash tank heater
- Hi-limit thermostat and low water protection
- Detergent/rinse additive signal connection fuse box
- Front stainless steel dress panel
- Uses standard 20" x 20" racks
- Adjustable bullet feet
- Durable stainless steel construction
- Requires some assembly



Specification Statement

Specified unit will be a Jackson TempStar FL-VER front-loading ventless high temperature sanitizing door-type dishwasher with energy recovery, rated by ETL Sanitation to NSF/ANSI Standard 3 and operates on a 3/4" cold water supply. Unit will be ENERGY STAR® certified. Unit to be rated for 41 racks per hour, 0.89 gallons per rack, and will include a built-in 70 °F rise booster heater with Sani-Sure™ final rinse system, four (4) selectable timed cycles, and top mounted controls. Other features include automatic tank fill, delime mode, vent fan control, and 1 HP stainless steel wash pump motor. Constructed of durable stainless steel with adjustable bullet feet.

1-year parts and labor warranty.

Options & Accessories


- 460V Electrical
- Single Phase
- Drain Water Tempering Kit
- Water Hammer Arrestor
- Flanged Feet
- Security Package
- Scaltrol
- Replacement Cartridge for Scaltrol
- 36-Compartment Rack
- 4-1/8" tall (105 mm)
- 5-5/8" tall (143 mm)
- 7" tall (178 mm)
- Combination Rack
- Peg Rack

JACKSON VENTLESS TECHNOLOGY SAVINGS

Purchase & Installation of Vent Hood \$7,000 - **Eliminated!**
 HVAC Used to Evacuate Steam \$1,250 - **Eliminated!**
 Energy Recovery \$575 - **Eliminated!**




TOTAL SAVINGS \$8,825 the first year
 \$1,825 every year after

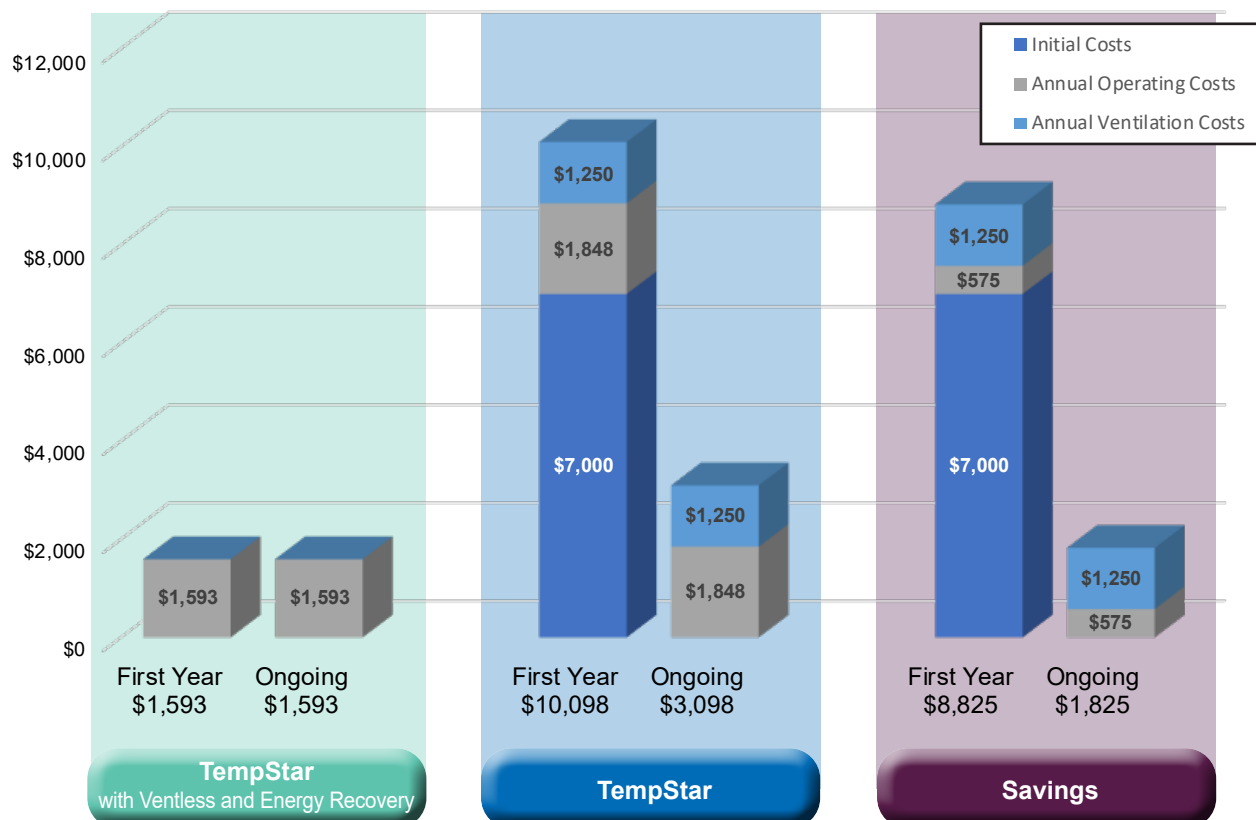

The following standards were used to calculate the above:


Days per week	7	Cycles per day	200	Ground water temp	65	Gas cost per therm	\$0.8600
Hours per day	12	Water cost per gallon	\$0.00698	Electric cost per kW	\$0.0962	Hood	450 CFM

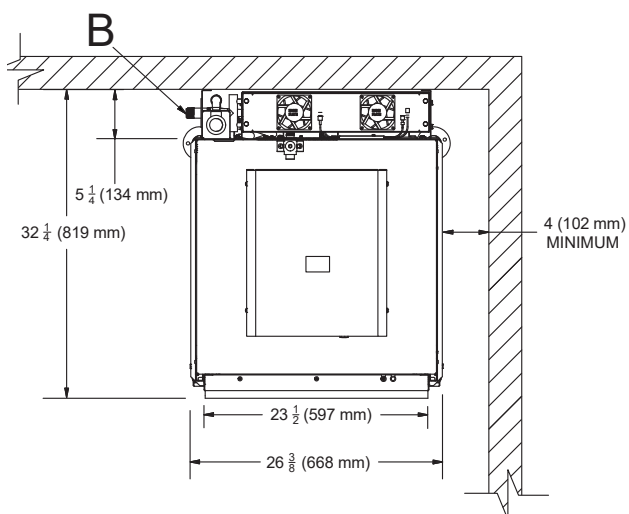

LEGEND

- A - Drain (1 1/2" NPT)
- B - Water Inlet (3/4" NPT)
- C - Electrical Connection

All dimensions from the floor
can be increased 1 1/8" using the
machine's adjustable feet.

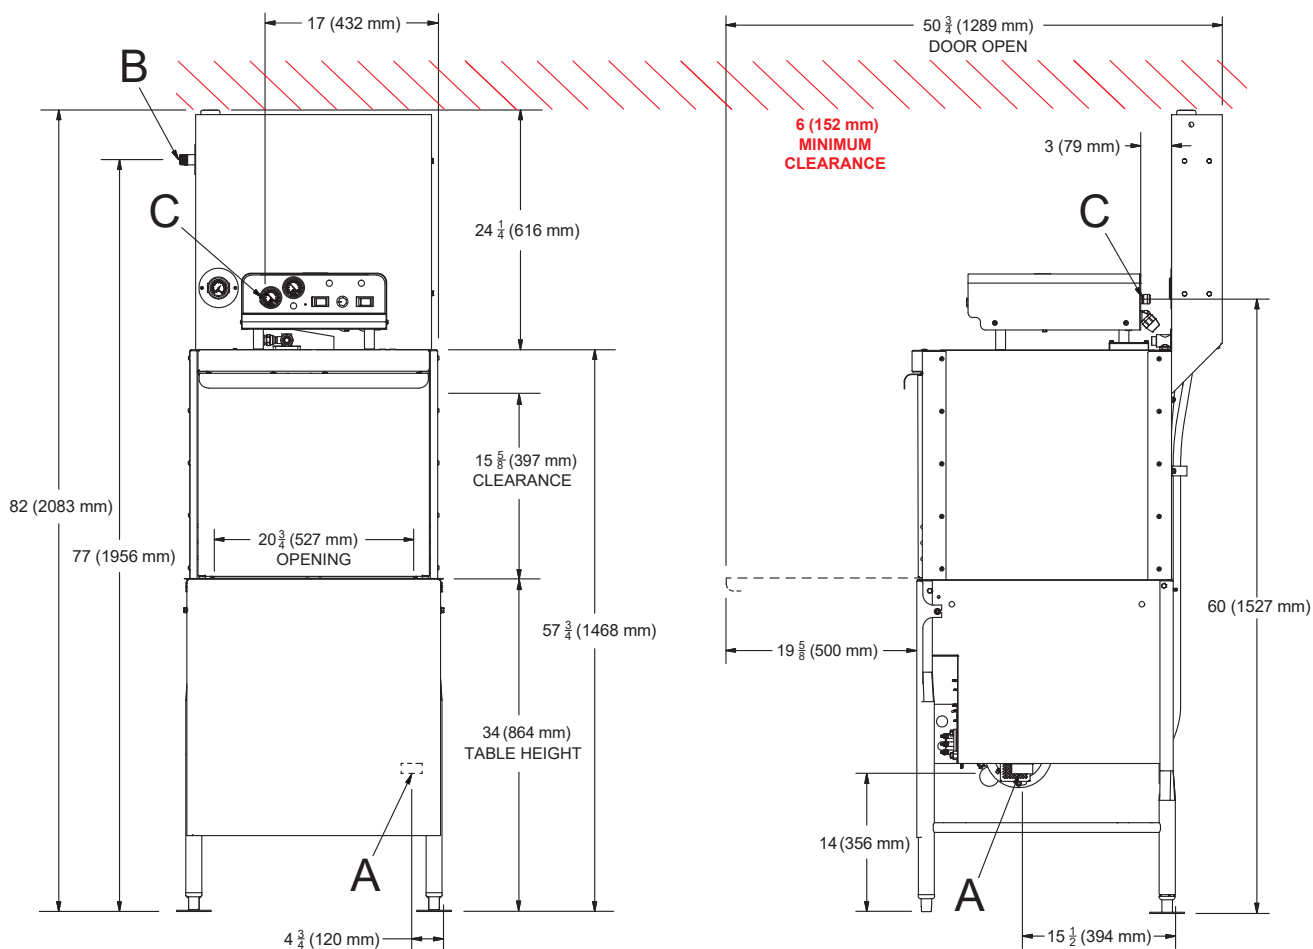

Operating Capacity (Normal Cycle)

Racks per Hour	41 (30)*
Dishes per Hour	1,025
Glasses per Hour	1,476

Operating Temperature

Wash Temperature (minimum)	150 °F/66 °C
Rinse Temperature (minimum)	180 °F/82 °C

Operating Cycle (seconds)

	Wash	Rinse	Dwell	Vent	Total Cycle
Normal	40	10	07	30	87
Medium	100	10	07	30	147
Heavy	160	10	07	30	207
Extra Heavy	280	10	07	30	327

Water Consumption

Gallons per Rack	0.89 (2.7 L)
Gallons per Hour	36.49 (138.1 L)
Gallons per Hour**	26.70 (101.1 L)
Wash Tank Capacity (gallons)	8.00 (30.3 L)
Booster Tank Capacity (gallons)	2.00 (7.6 L)

Water Requirements

Incoming Water Temperature	40-90 °F/5-33 °C
Flow Pressure (PSI)	10
Incoming Water Connection (NPT)	3/4"
Drain Connection (ID)	1 1/2"

Electrical Specifications

Wash Pump Motor (HP)	
208V	1
230V	1
460V	3/4
Wash Tank Heater (kW)	
208V	4.1
230V	5.0
460V	5.0
Rinse Tank Heater (kW)	
208V	10.5
230V	12.9
460V	12.9

Power Supply	Total Load	Minimum Circuit Ampacity	Maximum Overcurrent Protection
208/60/3	45.6 A	46.8 A	50.0 A
230/60/3	49.8 A	51.1 A	60.0 A
460/60/3	23.6 A	23.9 A	30.0 A
208/60/1	75.2 A	76.5 A	80.0 A
230/60/1	82.7 A	83.9 A	90.0 A

Heat Output (BTU/HR)

Latent Heat	2100
Sensible Heat	4685

Dimensions

Width	26 3/8" (668 mm)
Depth	32 1/4" (819 mm)
Depth with Door Open	50 3/4" (1289 mm)
Height	82" (2083 mm)
Clearance Above	
Heat Exchanger (minimum)	6" (152 mm)
Inside Clearance Height	15 5/8" (397 mm)
Wall Clearance	
Rear	0" (0 mm)
Side (corner installation)	4" (102 mm)
Drain Height	14" (356 mm)
Weight	318 lbs (144 kg)

Shipping Details

Shipping Weight	358 lbs (162 kg)
Shipping Width	42" (1067 mm)
Shipping Depth	42" (1067 mm)
Shipping Height	70" (1778 mm)
Shipping Cube	71.46 cu ft
Shipping Class	200

Advisory: Jackson WWS, Inc. DOES NOT endorse "Tankless On-Demand" water heaters for use with our dishmachines. Jackson WWS, Inc. DOES endorse, and highly recommends, standard "tank" style water heaters, sized to properly handle the water heating requirements of the facility.

*Racks per hour calculated with NSF suggested load time of :30 for front opening dishmachines.

**Gallons per hour calculated with NSF suggested load time of :30 for front opening dishmachines.

CONTACT JACKSON

07610-005-09-54 [05/07/26]

Address

 6209 N U.S. Highway 25E
 Gray, Kentucky 40734

Website
www.jacksonwws.com
Telephone & Fax

 T 888.800.5672
 F 606.523.1799

Email
customer.service@jacksonwws.com


@JACKSONWWS



JACKSON WWS



JACKSON WAREWASHING SYSTEMS



@JACKSONWAREWASHING