



# VACUUM SEALER SU-6100GP+

Double chamber vacuum packing machine. 100m<sup>3</sup>/h.



FOOD PRESERVATION AND SOUS-VIDE  
VACUUM PACKING MACHINES • SENSOR ULTRA LINE



## SALES DESCRIPTION

High performance model with tilting cover, double chamber and 4 x 662 mm. sealing bars.  
100 m<sup>3</sup>/h Busch vacuum pump.  
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 25-programme memory. Blocking option.
- ✓ "Pause" button.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Progressive decompression.
- ✓ Stainless steel body and chambers.
- ✓ Tilting cover made of thick, robust stainless steel.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.

## INCLUDES

- ✓ Inert gas flush (G models).
- ✓ Wireless connectivity and connection for printer (P models).
- ✓ PLUS welding for retort pouches (+ models).
- ✓ BUSCH pump.
- ✓ Sensor Controls.
- ✓ 25 programmable settings.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF Approved.
- ✓ 4 filling plates.

## OPTIONAL

- ☐ Printer
- ☐ Vacuum packing bags
- ☐ External vacuum kit for Vac-Norm, containers and accessories
- ☐ Bag cutting kit
- ☐ Support for liquid packaging
- ☐ Additional filling plates

## ACCESSORIES

- ☐ Bag cutting kits
- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Smooth bags for vacuum packing
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

## SPECIFICATIONS

Pump capacity: 3500 cf/h  
Bar length: 26" + 26"  
Total loading: 3 Hp  
Vacuum pressure (maximum): 0.5 mbar

### Internal dimensions

- ✓ Width: 26"
- ✓ Depth: 25.8"
- ✓ Height: 8"

### External dimensions (W x D x H)

- ✓ Width: 65"
- ✓ Depth: 35"
- ✓ Height: 54"

Noise level (1m.): 75 dB(A)  
Background noise: 32 dB(A)

### Crated dimensions

38.6 x 67.7 x 50.4 "

## AVAILABLE MODELS

1141048	SU-6100GP+ 220/60/3
1141072	SU-6100GP+ 208-240/60/3
1141069	SU-6100P 208-240/60/3 USA

\* Ask for special versions availability




# VACUUM SEALER SU-6100GP+

Double chamber vacuum packing machine. 100m³/h.



FOOD PRESERVATION AND SOUS-VIDE  
VACUUM PACKING MACHINES · SENSOR ULTRA LINE

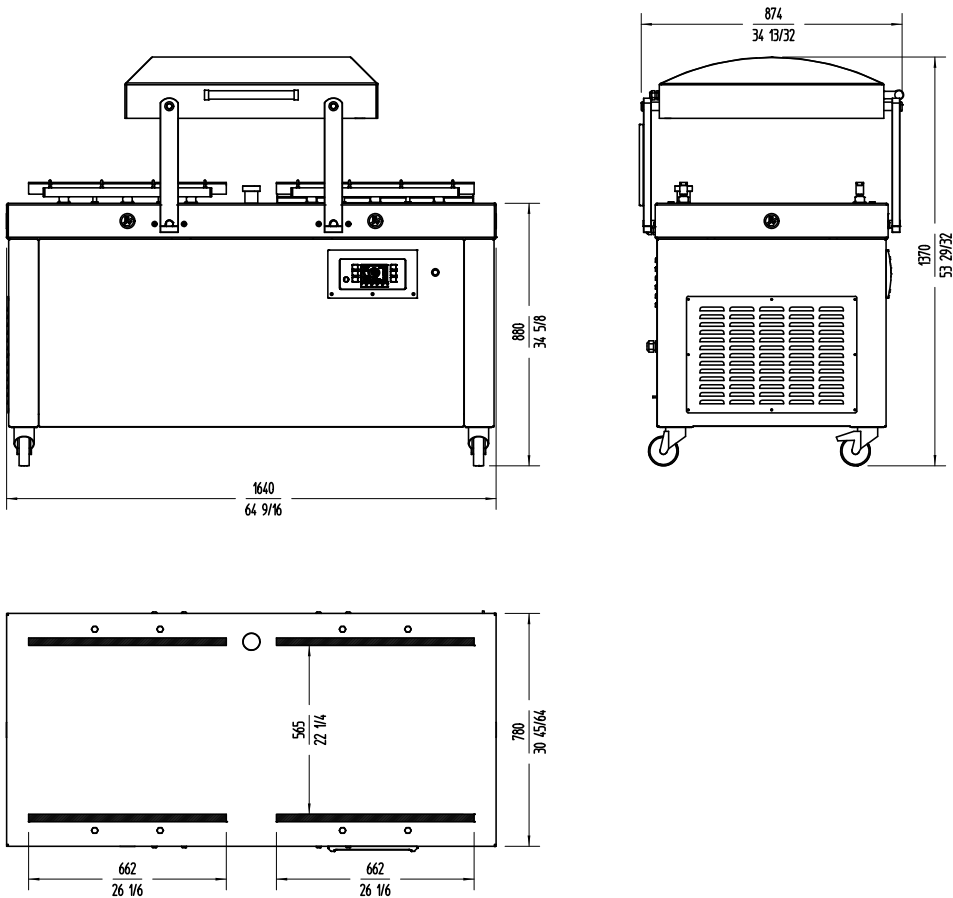

**sammic** | [www.sammic.us](http://www.sammic.us)  
Food Service Equipment Manufacturer

[usa@sammic.com](mailto:usa@sammic.com)  
1225 Hartrey Avenue  
60202-1056 Evanston, IL

phone +1 (224) 307-2232  
toll free +1 844 275 3848



Project	Date
Item	Qty
Approved	

product sheet  
updated 03/15/24